

NEW



EASY HOT SINGLE HOT LAMINATOR

Single hot laminator for self-adhesive materials. It allows to laminate and mount. Designed to be durable and robust for excellent and high quality finishing results.

- Professional single hot laminator designed to improve your productivity every day with great precision and speed

NEW Wide range of working types thanks to the **SINGLE HOT ROLLER** up to 120°C and the **DIGITAL THERMOREGULATOR** (it works with both pressure sensitive and hot film)

- Extremely fast: it works up to 10 m/min (33 ft/min)
- Always excellent results without air bubbles and defects
- It laminates cardboards, mounts images on panels even of big dimensions, apply double-sided adhesive films, application tape and protective films
- Intuitive set up parameters thanks to the user-friendly control panel with new roller pressure indicator: best results guaranteed avoiding "overpressure" when mounting and laminating (typical "smile" effect)

SUITABLE FOR:

- Printed flexible media
- Rigid panels
- Cardboard (packaging)
- Car wrapping
- Floor graphics
- Backlit displays
- Graphics for exhibitions
- Roll-up banner & pop-up displays
- Table displays
- Many more..





New roller pressure display to avoid "overpressure"



Digital thermoregulator for a very precise roller temperature setting



Millimeter scale on each shaft for the right positioning of the media



Aluminum shafts with automatic locking system

Double safety photosensitive cell avoiding finger crushing and emergency button



Sliding steel worktop for easy loading of materials
Feed-in guide (optional)



Feeding command by control panel or foot switch (hands free operation)

- Rewinding shaft with clutch
- Unwinding shaft for sensitive and hot film
- Rear unwinding shaft for printed media
- Rear rewinding shaft with clutch and shedding bar (optional)
- Manual lifting of the upper roller with the hand-wheel (motorized lifting optional)
- Front unwinding shaft for printed media (optional)



Front tray for prints (optional)




Reference square with guide (optional)



Cutting bar with two knives (optional)

Working width	1600 mm (65 in.)
Max. space between rollers	40 mm (1,6 in.)
Silicone rubber rollers	Ø 130 mm (5,2 in.)
Inner core available	2" NEW / 3"
Electronic temperature regulation for upper roller	from 0°C to 120°C (from 0°F to 248°F)
Max. speed	10 m/min. (33 ft./min.)
Working height	890 mm (36 in.)
Power supply	230 V - 50/60 Hz - 3500 W
Dimensions (W x D x H)	2050 x 800 x 1300 mm (81 x 32 x 51 in.)
Weight	240 kg (530 lbs)
Packing dimensions (W x D x H)	2150 X 950 X 1600 mm (85 x 37 x 63 in.)
Packing weight	340 kg (750 lbs)

Distributor

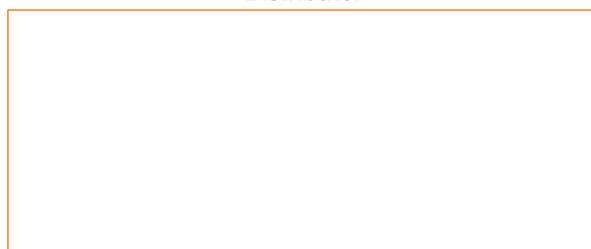

Manufactured in compliance with CE regulations



Follow us:



100% Made by FLEXA

 100% Made in Italy